



GROUP

Computerized Touch Screen Universal Testing Machine

Model - UTE-TS



MatrixTestingMachineServices

Sold and Serviced by :

MATRIX TESTING MACHINE SERVICES

Kalewadi, Pimpri, Pune 411017

Email : matrixtestingmachineservices@gmail.com

Website : www.matrixtestingmachineservices.com

Features :

- Loading accuracy as high as $\pm 1\%$
- Straining at variable speeds to suit a wide range of materials.
- Windows based touch screen control panel with printing connectivity.
- Motor driven threaded columns for quick effortless adjustment of lower cross-head-to facilitate rapid fixing of test specimen.
- Wide range of standard and special accessories.
- Easy change from plain to threaded and screwed specimens.
- Large effective clearance between columns enables testing of standards specimens as well as structures.
- Simple controls for ease of operation.
- Robust straining frame of an extremely rigid construction.
- Safe operation ensured by means of safety devices.
- Fully enclosed and protected pressure transducer.
- Manual control & release valve operation.
- Load Capacity : 100 kN, 200 kN, 400 kN, 600 kN, 1000 kN, 1200 kN, 1500 kN and 2000 kN.

Application :

'FIE' Electronic Universal Testing Machine is designed for testing materials and other materials under tension, compression bending, transverse and shear loads. Hardness test on metals can also be conducted.

Machine Consists of-

Straining unit :

This consists of a cylinder motor with chain and sprocket drive and a table coupled with the ram of the hydraulic cylinder, mounted on to a robust base. The cylinder and the ram are individually lapped to eliminate friction. The upper cross-head is rigidly fixed to the table by two strengthened columns.

The lower cross-head is connected to two screwed columns which are driven by a motor. Axial loading of the ram is ensured by relieving the cylinder and ram of any possible side loading by the provision of ball seating.

An displacement scale, with a minimum graduation of 1mm, is provided to measure the deformation of the specimen.

Tension test is conducted by gripping the test specimen between the upper and lower cross-heads.

Compression, transverse, bending, shear and hardness tests are conducted between the lower cross-head and the table.

The lower cross-head can be raised or lowered rapidly by operating the screwed columns, thus facilitating ease of fixing of the test specimen.

Control Panel :

The Control Panel consists of a power pack complete with drive motor and an oil tank, control valves and electronic display unit.

Power Pack :

The power pack generates the maximum pressure of 200 kgf/cm². The hydraulic pump provides continuously non-pulsating oil flow. Hence the load application is very smooth.

Hydraulic Controls :

Hand operated wheels are used to control the flow to and from the hydraulic cylinder.

The regulation of the oil flow is infinitely variable. Incorporated in the hydraulic system is a regulating valve, which maintains a practically constant rate of piston movement.

Control by this valve allows extensometer reading to be taken.

Principle of Operation for -

UTE-TS :

Operation of machine is by hydraulic transmission of load from the test specimen through pressure transducer to a separately housed load indicator.

The system is ideal since it replaces transmission of load through levers and knife edges, which are prone to wear and damage due to shock on rupture of test pieces.

Load is applied by a hydrostatically lubricated ram.

Main cylinder pressure is transmitted to the pressure transducer housed in the control panel.

The transducer gives the signal to the electronic display unit, corresponding to the load exerted by the main ram.

Simultaneously the encoder fitted on the straining unit gives the mechanical displacement to the electronic display unit.

Both the signals are processed by the microprocessor and load and displacement is displayed on the touchscreen simultaneously.

Computerized Touch Screen Control Panel

Series : UTE-2014-TS

PLC based panel incorporating state of art technology with following features -

- Front panel touch screen display
- Data entry of test parameters including pre-load, rupture %, Safe Load & Specimen data etc.
- Online graph of load Vs Displacement directly on screen.
- USB Printer port for printer interface with graph & result print out.
- Facility to export the result/ Data to PDF, EXCEL, WORD & CSV formats.
- Windows based software available for Online graph on PC, Data analysis, Statistics, Point tracing, superimposing graphs to compare with standard, zooming graph etc.



Accuracy and Calibration :

FIE Electronic Universal testing machine is closely controlled for sensitivity, accuracy and calibration during every stage of manufacture.

Machine is calibrated over each of its measuring range in accordance with the procedure laid down in British standards 1610: Part1: 1992 and IS 1828: Part1: 1991.

FIE Electronic Universal Testing Machine complies with Grade "A" of BS: 1610:Part1:1992 and class 1 of IS-1828-Part1:1991.

Sold and Serviced by :

MATRIX TESTING MACHINE SERVICES

Kalewadi, Pimpri, Pune 411017

Email : matrixtestingmachineservices@gmail.com

Website : www.matrixtestingmachineservices.com

Technical Specifications for -
Computerized Touch Screen Universal Testing Machines
Model – UTE-TS

| MODEL | UNIT | UTE-TS 10 | UTE-TS 20 | UTE-TS 40 | UTE-TS 60 | UTE-TS100 | UTE-TS 120 | UTE-TS 150 | UTE-TS 200 |
|---|--------|-----------|-----------|-----------|-----------|------------|------------|------------|------------|
| Maximum Capacity | kN | 100 | 200 | 400 | 600 | 1000 | 1200 | 1500 | 2000 |
| Measuring range | kN | 0-100 | 0-200 | 0-400 | 0-600 | 0-1000 | 0 – 1200 | 0 – 1500 | 0-2000 |
| Load resolution (20000 counts full scale) | N | 5 | 10 | 20 | 30 | 50 | 60 | 75 | 100 |
| Load range with accuracy of Measurement +/-1% | kN | 2 to 100 | 4 to 200 | 8 to 400 | 12 to 600 | 20 to 1000 | 24-1200 | 30-1500 | 40-2000 |
| Resolution of piston movement (Displacement) | mm | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 |
| Clearance for tensile test (At fully descended working piston) | mm | 50-700 | 50-700 | 50-700 | 50-800 | 50-850 | 50-850 | 50-850 | 50-850 |
| Clearance for compression test (At fully descended working piston) | mm | 0-700 | 0-700 | 0-700 | 0-800 | 0-850 | 0-850 | 0-850 | 0-850 |
| Clearance between columns | mm | 500 | 500 | 500 | 600 | 750 | 750 | 750 | 750 |
| Ram Stroke | mm | 150 | 200 | 200 | 250 | 250 | 250 | 250 | 250 |
| Straining/ Piston Speed (at no load) | mm/min | 0-300 | 0-150 | 0-150 | 0-100 | 0-80 | 0-65 | 0-50 | 0-45 |
| CONNECTED LOAD | | | | | | | | | |
| Power | HP | 1.33 | 1.33 | 2.33 | 2.5 | 3.5 | 3.5 | 5 | 6 |
| V | | 400-440 | 400-440 | 400-440 | 400-440 | 400-440 | 400-440 | 400-440 | 400-440 |
| Φ | | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 |
| STANDARD ACCESSORIES | | | | | | | | | |
| FOR TENSION TEST | | | | | | | | | |
| Clamping jaws for round specimens of diameter | mm | 10-20 | 10-20 | 10-25 | 10-25 | 10-25 | 10-25 | 10-25 | 10-25 |
| | | 20-30 | 20-30 | 25-40 | 25-40 | 25-45 | 25-45 | 25-45 | 25-45 |
| Clamping jaws for flat specimens of thickness | mm | 0-10 | 0-10 | 0-15 | 0-15 | 0-22 | 0-20 | 0-20 | 0-20 |
| | | 10-20 | 10-20 | 15-30 | 15-30 | 22-44 | 20-40 | 20-40 | 20-40 |
| Width | mm | 50 | 50 | 65 | 70 | 70 | 70 | 70 | 70 |
| FOR COMPRESSION TEST | | | | | | | | | |
| Pair of Compression Plates of Dia. | mm | 120 | 120 | 120 | 120 | 160 | 160 | 160 | 160 |
| FOR TRANSVERSE TEST | | | | | | | | | |
| Table with adjustable rollers | | | | | | | | | |
| Width of rollers | mm | 160 | 160 | 160 | 160 | 160 | 160 | 200 | 200 |
| Diameter of Rollers | mm | 30 | 30 | 30 | 50 | 50 | 50 | 50 | 50 |
| Maximum clearance between supports | mm | 500 | 500 | 500 | 600 | 800 | 800 | 800 | 800 |
| Radius of punch tops | mm | 6,12 | 6,12 | 12,16 | 16,22 | 16,22 | 16, 22 | 16, 22 | 16, 22 |

- Due to constant R& D specifications & features are subject to change without notice.
- Colour scheme subject to confirm at the time of order.



'FIE' Tension & Compression Test Software Package for -
UTE-TS (Standard Supply with TS Models).

Home Screen



Displays values of load, displacement & extension with dial for displaying load.

Graph superimpose, Comparison & point tracing



Graph comparison, superimpose of batch sample tests with Graph zooming and point tracing facility.

Real Time Graph



Real time values of load and displacement / extension used for plotting its graph & can be seen real time during testing & facility to convert the units simultaneously.

Load Vs Extension




Displays graph for extensometer readings against load with proof lines for proof stress.

Final Result



Displays basic results of test conducted & automatically pop ups after test ends with facility to convert the units.

Statistics

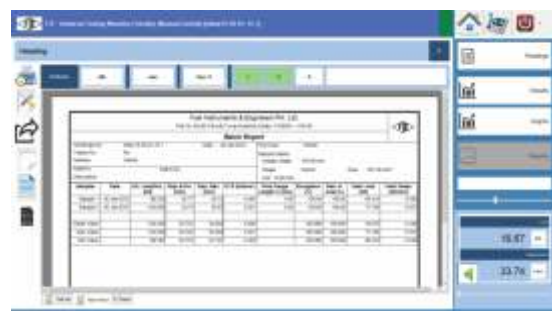

Batch test reports with statistics for batch sample results & can be exported to various formats (DOC, XLS, CSV & PDF)